

APP CRS	Rwy Idg	11200
230°	TDZE	783
	Apt Elev	796

RNAV (RNP) Z RWY 23R
INDIANAPOLIS INTL (IND)

V For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS Required. For inoperative ALS, increase RNP 0.15 all Cats visibility to RVR 6000 and increase RNP 0.30 all Cats visibility to 1 3/8 SM. Simultaneous approach authorized.

MALSR



MISSED APPROACH:
Climb to 1200 then
climbing right turn to
3000 direct KEADY
and hold.

D-ATIS
134.25

INDIANAPOLIS APP CON
128.175 317.8


INDY TOWER
120.9 257.8

GND CON
121.9

CLNC DEL
128.75 257.8

CPDLC

RADAR required for arrivals at TRAAK.

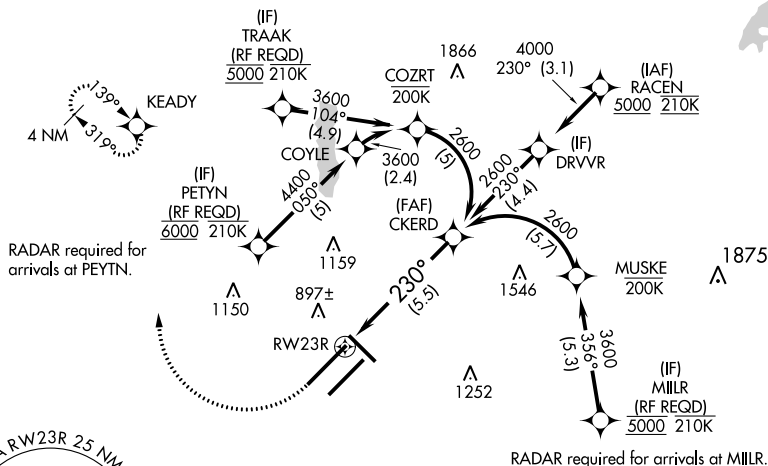

EC-2, 22 FEB 2024 to 21 MAR 2024

1 200

3000

KEADY

See planview for multiple IF locations.

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

RW23R

CKERD

3400

2600

GP 3.00°
TCH 5.5

CATEGORY

A

Q

D

RNP 0.15 DA


1147/40 364 (400-3%)

RNP 0.30 DA

1206/50 423 (500-1)

AUTHORIZATION REQUIRED

ELEV	796	D	TDZE	783
------	-----	----------	------	-----



HIRL all Rwy's
TDZ/CL Rwy's 5L and 5R

INDIANAPOLIS, INDIANA

Amdt 2 10NOV16

39°43'N-86°18'W

INDIANAPOLIS INTL (IND)

RNAV (RNP) Z RWY 23R

EC-2, 22 FEB 2024 to 21 MAR 2024