

LOC/DME I-FQD	APP CRS	Rwy Idg	5000
109.55	009°	TDZE	1059
Chan 32(Y)		Apt Elev	1077

LOC RWY 1


RUTHERFORD COUNTY/MARCHMAN FLD (FQD)

▼ VDP NA with Shelby-Cleveland County Rgnl altimeter setting. When local altimeter setting not received, use Shelby-Cleveland County Rgnl altimeter setting and increase all MDA 80 feet and S-1 Cat C and D and Circling Cat C visibilities $\frac{1}{8}$ mile; increase Circling Cat D visibility $\frac{1}{4}$ mile. DASCFA fix minimums: Increase S-1 Cat C and D and Circling Cat C and D visibilities $\frac{1}{4}$ mile.

▲ NA

MISSED APPROACH: Climb to 1800 then climbing left turn to 3000 on heading 165° and on I-FQD localizer south course to EPOZI INT/I-FQD 12.8 DME and hold.

AWOS-3	GREER APP CON ★	UNICOM
118.275	119.4 350.2	122.8 (CTAF) 0

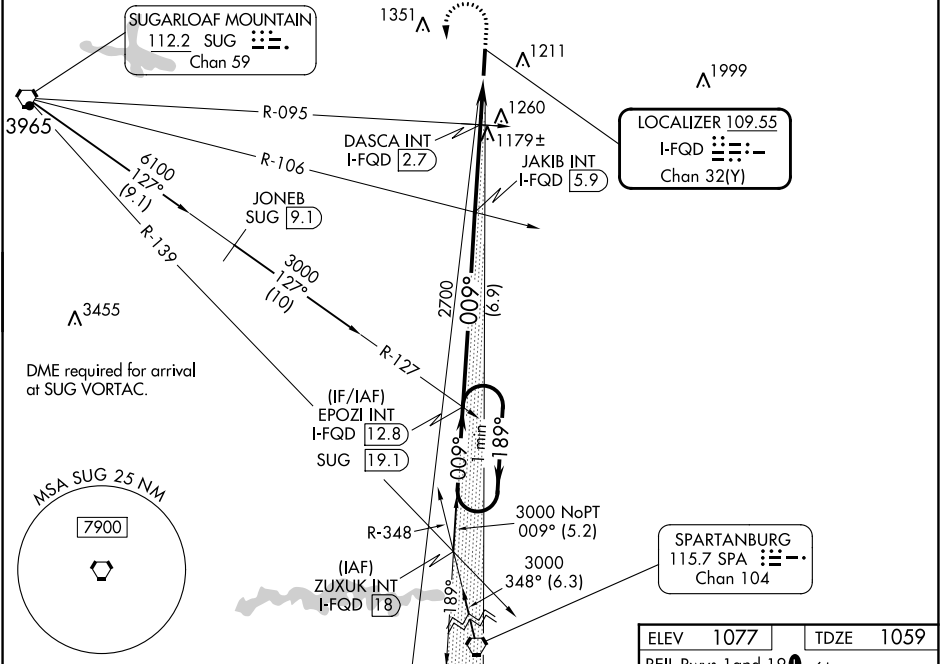

One Minute Holding Pattern		EPOZI INT I-FQD 12.8		JAKIB INT I-FQD 5.9		DASCA INT I-FQD 2.7		EPOZI INT I-FQD 0.9	
3000		1800		3000		1800		3000	
189°		009°		009°		009°		009°	
*1680 when using Shelby-Cleveland County Rgnl altimeter setting.		*1600		*1600		*1600		*1600	
6.9 NM		3.2 NM		0.7 NM		1.1			
CATEGORY	A	B	C	D					
S-1	1600-1	541 (600-1)	1600-1½	541 (600-1½)					
CIRCLING	1600-1 523 (600-1)	1620-1 543 (600-1)	1640-1½ 563 (600-1½)	1820-2½ 743 (800-2½)					
DASCA FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)									
S-1	1440-1	381 (400-1)	1440-1½	381 (400-1½)					
CIRCLING	1560-1 483 (500-1)	1620-1 543 (600-1)	1640-1½ 563 (600-1½)	1820-1½ 743 (800-1½)					
RUTHERFORDTON, NORTH CAROLINA									
RUTHERFORD COUNTY/MARCHMAN FLD (FQD)									
LOC RWY 1									

MIRL Rwy 1-19

5000 X 100

0.4% Up

009°

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

WAAS CH 40021 W01A	APP CRS 009°	Rwy Idg TDZE 1059 Apt Elev 1077
--	------------------------	---

RNAV (GPS) RWY 1


RUTHERFORD COUNTY/MARCHMAN FLD (FQD)

⚠

Baro-VNAV NA when using Shelby-Cleveland County Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Shelby-Cleveland County Rgnl altimeter setting and increase all DA 77 feet, all MDA 80 feet, and increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cats C/D visibility ¼ mile. VDP NA with Shelby-Cleveland County Rgnl altimeter setting.

MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct EPOZI and hold.

AWOS-3 118.275	GREER APP CON ★ 119.4 350.2	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

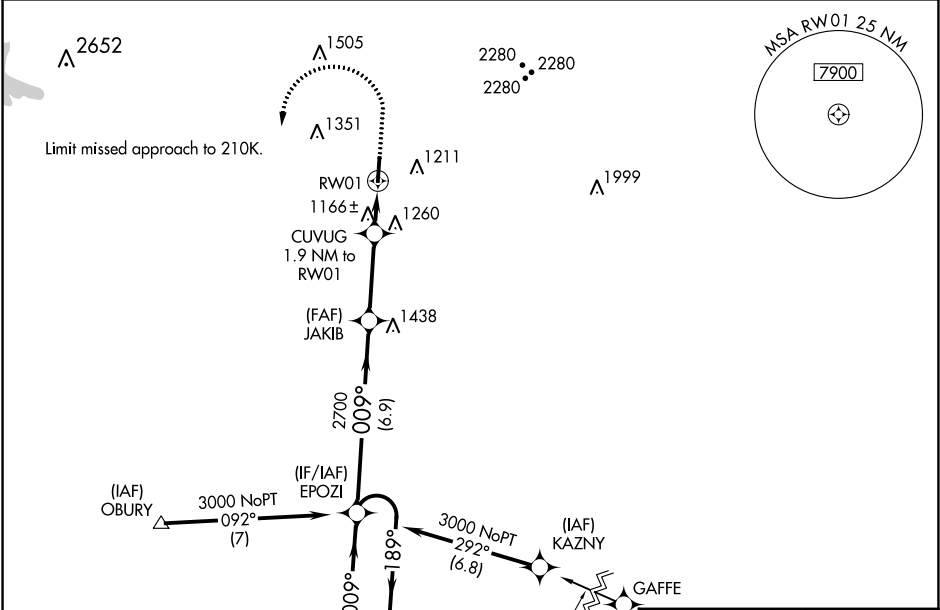

Procedure NA for arrivals at SPA VORTAC on V605 southbound.


ELEV 1077

TDZE 1059

REIL Rwy 1 and 19 0

MIRL Rwy 1-19 0

4 NM Holding Pattern				
GP 3.00° TCH 40				
*1700				
6.9 NM 3.1 NM 0.9 NM 1 NM				
CATEGORY	A	B	C	D
LPV DA		1309-7 ⁵ / ₈	250 (300-7 ⁵ / ₈)	
LNAV/VNAV DA		1459-13 ⁵ / ₈	400 (400-13 ⁵ / ₈)	
LNAV MDA		1420-1	361 (400-1)	
CIRCLING	1560-1 483 (500-1)	1620-1 543 (600-1)	1640-1½ 563 (600-1½)	1820-2½ 743 (800-2½)

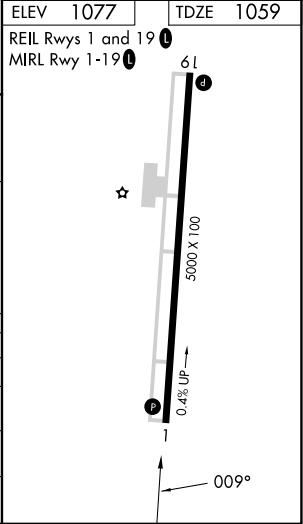

WAAS CH 82335	APP CRS 189°	Rwy Idg TDZE 1077	5000
W19A		Apt Elev 1077	

RNAV (GPS) RWY 19


RUTHERFORD COUNTY/MARCHMAN FLD (FQD)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Shelby-Cleveland County Rgnl altimeter setting and increase all MDA 80 feet and increase LP and LNAV Cat C and D ½ mile, increase Circling Cat C and D visibility ¼ mile. Rwy 19 helicopter visibility reduction below ¾ mile NA.

MISSED APPROACH:

Climb to 3000 direct EPOZI and hold.

AWOS-3 118.275	GREER APP CON ★ 119.4 350.2	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

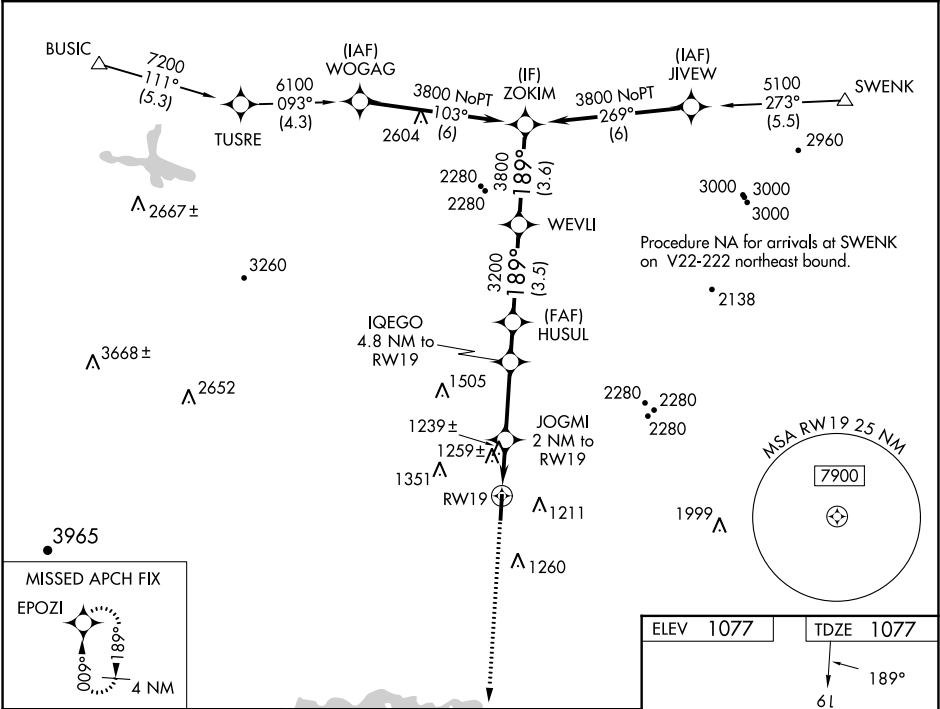

3000	EPOZI				
					
*LNAV only	JOGMI 2 NM to RW19	IQEGO 4.8 NM to RW19	HUSUL	WEVLI	ZOKIM
	*1 NM to RW19			189°	3800
	RW19	2720	3200	3800	
		*1780	 3.15° TCH 40		
	1 NM	1 NM	2.8 NM	1.4 NM	3.5 NM
				3.6 NM	
CATEGORY	A	B	C	D	
LP MDA	1500-1	423 (500-1)	1500-1¼	423 (500-1¼)	
LNAV MDA	1520-1	443 (500-1)	1520-1⅜	443 (500-1⅜)	
CIRCLING	1560-1 483 (500-1)	1620-1 543 (600-1)	1640-1½ 563 (600-1½)	1820-2½ 743 (800-2½)	

