




WAAS CH 86317 W18A	APP CRS 175°	Rwy Idg TDZE Apt Elev	4200 1435 1435
---------------------------------	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

QUENTIN AANENSON FLD (L.Y.V)

RNP APCH-GPS.	MISSED APPROACH: Climb to 3200 direct HEXAM and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below -17°C or above 54°C.	

AWOS-3 119.825	SIOUX FALLS APP CON * 125.8 284.725	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

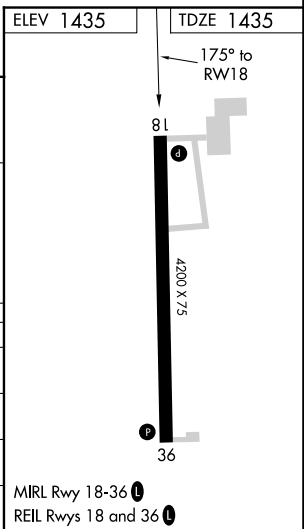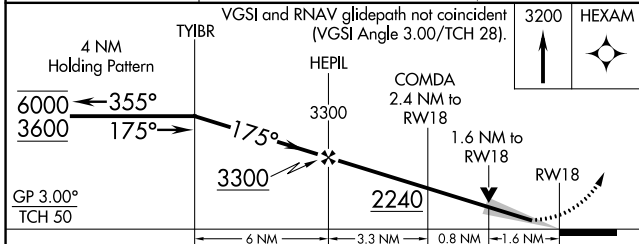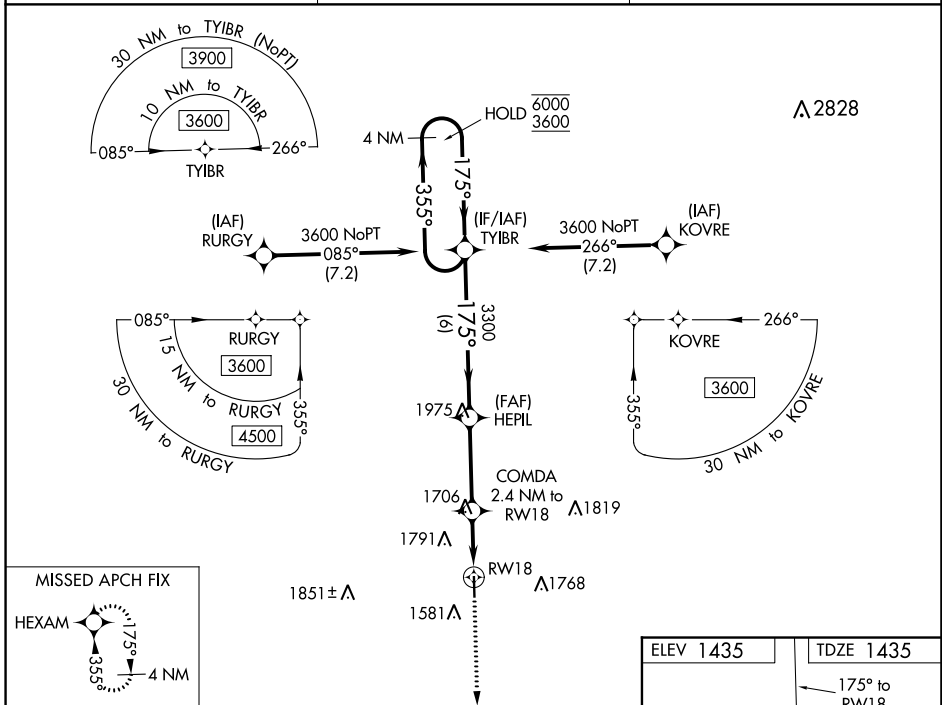

CATEGORY	A	B	C	D
LPV DA		1635-1	200 (200-1)	
LNAV/VNAV DA		1847-1½	412 (500-1½)	
LNAV MDA	1960-1	525 (600-1)	1960-1½	525 (600-1½)
CIRCLING	1960-1 525 (600-1)	2160-1 725 (800-1)	2360-2¾ 925 (1000-2¾)	2360-3 925 (1000-3)

NC-1, 16 JUN 2022 to 14 JUL 2022

NC-1, 16 JUN 2022 to 14 JUL 2022

WAAS CH 40117 W36A	APP CRS 355°	Rwy Idg 4200 TDZE 1432 Apt Elev 1435
--	------------------------	---

RNAV (GPS) RWY 36

QUENTIN AANENSON FLD (LYV)






NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pipestone altimeter setting: increase LPV DA to 1726 feet; increase LNAV/VNAV DA to 1976 feet and visibility all Cats ½ SM; increase all MDA 100 feet and visibility LNAV Cats C/D and Circling Cats B/C ¼ SM. Baro-VNAV and VDP NA when using Pipestone altimeter setting.

MISSED APPROACH:
Climb to 3300 direct TYBR and hold.


AWOS-3
119.825

SIoux FALLS APP CON ★
125.8 284.725

UNICOM
122.7 (CTAF) 0

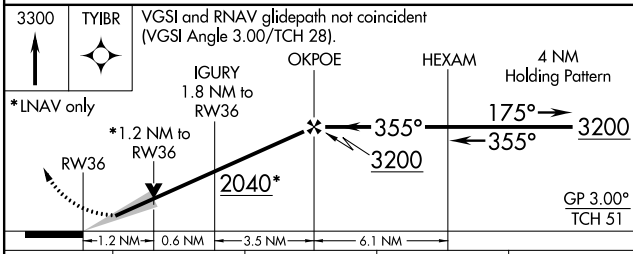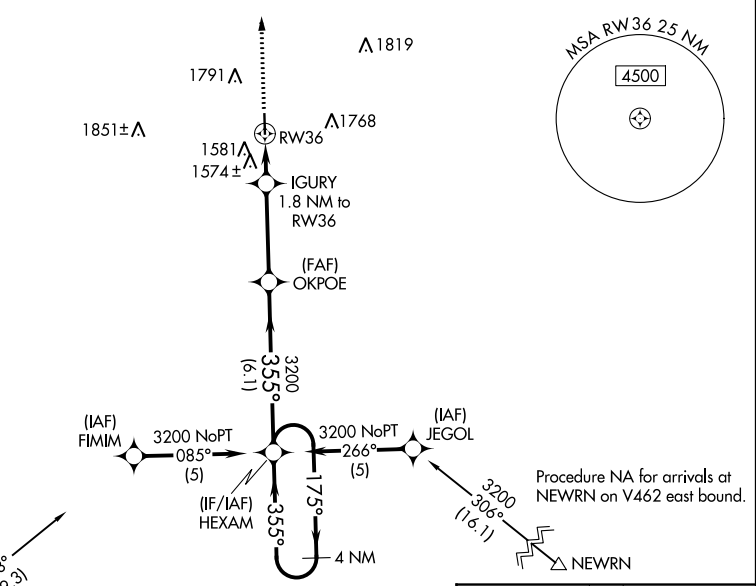

ELEV 1435	TDZE 1432
MIRL Rwy 18-36 0	
REIL Rwy 18 and 36 0	

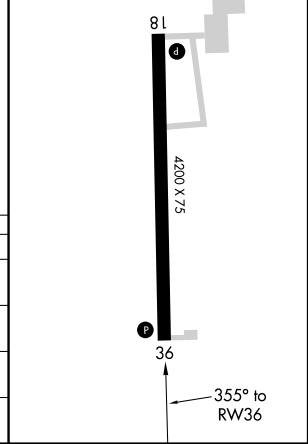

CATEGORY	A	B	C	D
LPV DA	1632-1 200 (200-1)			
LNAV/VNAV DA	1882-1½ 450 (500-1½)			
LNAV MDA	1840-1 408 (500-1)	1840-1¼ 408 (500-1¼)		
CIRCLING	1940-1 505 (600-1)	2160-1 725 (800-1)	2360-2¾ 925 (1000-2¾)	2360-3 925 (1000-3)

NC-1, 16 JUN 2022 to 14 JUL 2022

NC-1, 16 JUN 2022 to 14 JUL 2022