

WAAS CH 70709 W35D	APP CRS 350°	Rwy Idg TDZE 480 Apt Elev 501
--	------------------------	---

RNAV (GPS) Y RWY 35R

LOUISVILLE MUHAMMAD ALI INTL (SDF)


RNP APCH.

Circling Rwy 11 NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM.

ALS F-2

MISSED APPROACH:
Climb to 1600 then climbing right turn to 4000 direct TORAC and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
--------------------------	--	--	-------------------------------	--------------------------------	-------

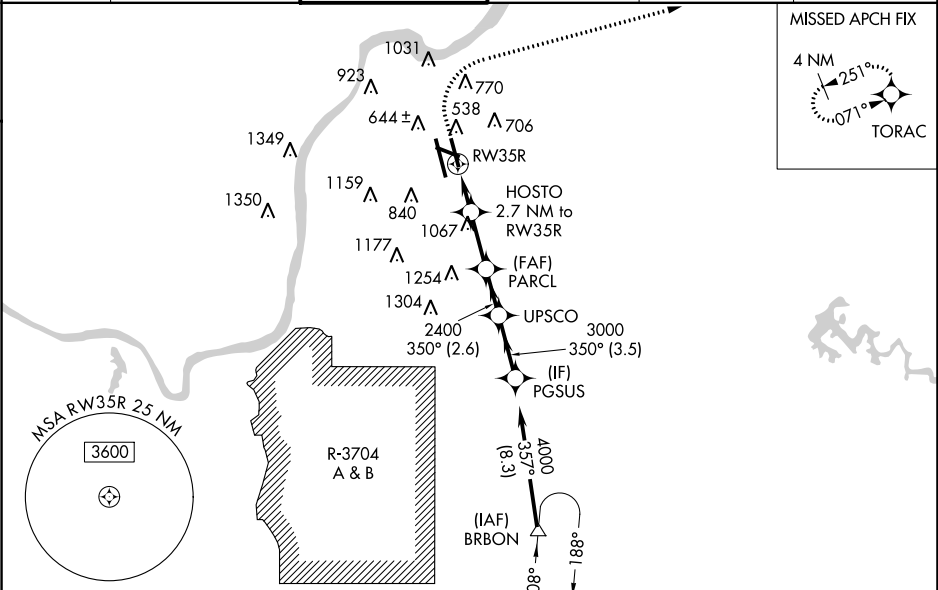

ELEV 501 D TDZE 480

HIRL all Rwys
TDZ/CL Rwys 17L, 17R, 35L, and 35R

1450

1600 4000 TORAC

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

*LNAV only.

*1.4 NM to RW35R

HOSTO 2.7 NM to RW35R

*1360

2400

3000

4000

GP 3.00° TCH 60

CATEGORY	A	B	C	D
LPV DA		680/18	200 (200-½)	
LNAV/VNAV DA		909/50	429 (500-1)	
LNAV MDA	1000/24	520 (500-½)	1000/55	520 (500-1)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)