

WAAS CH 65738 W23A	APP CRS 236°	Rwy Idg TDZE Apt Elev	3035 834 836
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23
SMITH FLD (SMD)

RNP APCH.


T
A

A NA
-22°C


Procedure NA at night. Rwy 23 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDA 40 feet and LP and LNAV Cat C visibility $\frac{1}{8}$ SM.

MISSED APPROACH: Climb to 2700 direct JISUD and on track 294° to WERBU and hold.

AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

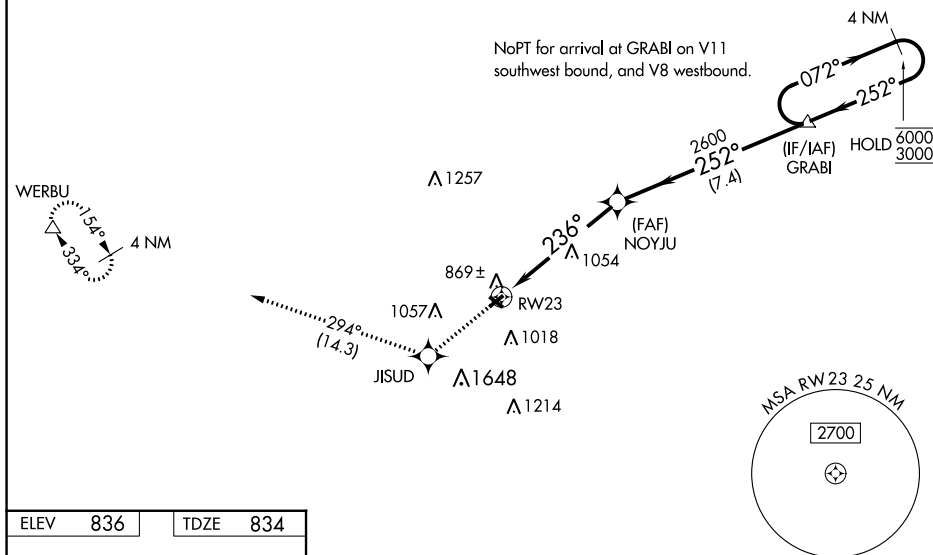

ELEV	836		TDZE	834
------	-----	--	------	-----



MIRL Rwy 5-23 and 13-31 L

FORT WAYNE, INDIANA

Amdt 1A 20JUN19

41°09'N-85°09'W

SMITH FLD (SMD)

RNAV (GPS) RWY 23

EC-2, 22 FEB 2024 to 21 MAR 2024

		2700 ↑	JISUD 	fr 294° 	WERBU 	Visual Segment - Obstacles.		4 NM Holding Pattern	
						GRABI			
						NOYJU			
		RW23			*	2600	236°	252°	072° → <u>6000</u> ← 252° <u>3000</u>
		5.4 NM		7.4 NM					
CATEGORY	A	B	C	D					
LP MDA	1360-1	526 (600-1)	1360-1½ 526 (600-1½)	NA					
LNAV MDA	1400-1	566 (600-1)	1400-1⅝ 566 (600-1⅝)	NA					
C CIRCLING	1400-1	564 (600-1)	1940-3 1104 (1200-3)	NA					